


# BULLDOG "SCUBA YOKE" FILL STATION

*INSTRUCTION MANUAL*




## Instructions on the use of the Bulldog Fill Station

1. Inspect the sealing ring on the Bulldog Fill Station and confirm that it is in good working condition.
2. Place the Bulldog Fill Station over the yoke valve on your tank.
3. Carefully align the sealing ring of the Bulldog Fill Station (*Figure 1*) with the O-ring groove on the yoke valve (*Figure 2*).

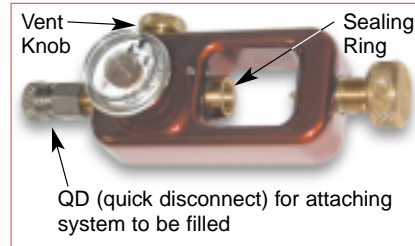

**Figure 1**

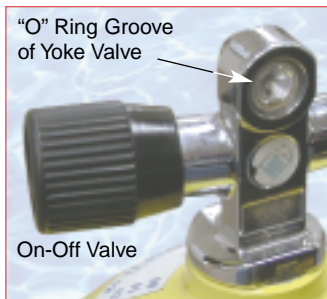

**Figure 2**


4. Tighten the tension knob on the Bulldog Fill Station to firmly attach the Bulldog Fill Station to the yoke valve.
5. Close the vent knob (*Figure 3*) on the Bulldog Fill Station.
6. Attach tank to be pressurized to the quick disconnect fitting (*Figure 4*) on the Bulldog Fill Station.
7. Open the on/off valve on the tank and fill the tank with pressurized air. **DO NOT OVERPRESSURIZE**

**THE TANK.** CGA (*Compressed Gas Association*) recommended filling time is 1000 PSI per minute. **AVOID QUICK FILLS!!**

8. When the tank is filled with pressurized air, close the on/off valve on the tank.
9. Open the vent knob (*Figure 3*) on the Bulldog Fill Station.



**Figure 3**

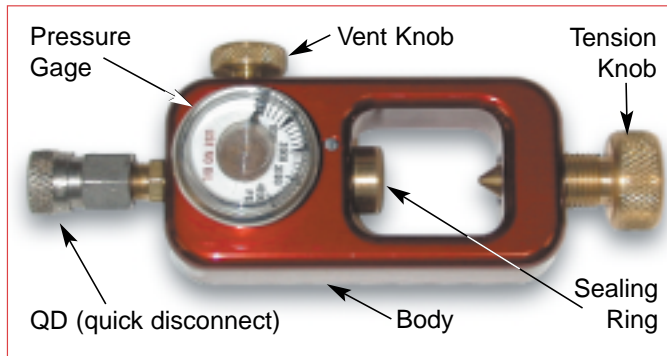

**Figure 4**

10. Back off the tension knob on the Bulldog Fill Station (*Figure 3*) and remove the Bulldog Fill Station from the yoke valve of the tank.



701 S. Auto Center Dr. • Ontario, CA 91761

**TEL: (909) 390-2323**

[www.acisports.com](http://www.acisports.com) • **email:** [techshop@airconcepts.com](mailto:techshop@airconcepts.com)